


## Metal button switch (Wiring terminal) 19 A

### Model: IB19A

- Head Style (★) : P Flat Round Shape  
 Switch Combination (□) : 10-1NO  
 Connection type (■) : J Wiring terminal  
 Hull Material (●) : S Stainless steel  
                               N Brass nicklage  
                               A Aluminum alloy anodize black

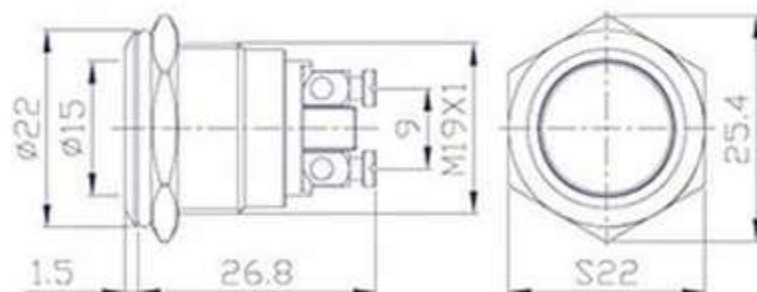

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| Tail configuration    | 接线柱 Wiring terminal                                    |
| Switch specifications | 5A/250VAC                                              |
| Contact resistance    | $< 50\text{m}\Omega$                                   |
| Insulation resistance | $> 1000\text{M}\Omega$                                 |
| Dielectric Intensity  | 2000VAC                                                |
| Ambient temperature   | $-20^{\circ}\text{C} \sim +55^{\circ}\text{C}$         |
| Mechanical life       | 50万次以上 500,000 cycles                                  |
| Electrical life       | 5万次以上 50,000 cycles                                    |
| Panel thickness       | 1 ~ 10mm                                               |
| Nut torque            | 5 ~ 14Nm                                               |
| Operation pressure    | 约4N About 4N                                           |
| Operation stroke      | 约1.8mm About 1.8mm                                     |
| Protection level      | IP67, IK08                                             |
| Contact               | 银合金 Silver alloy                                       |
| 材料 Material           | Button 黄铜镀镍/不锈钢<br>Nickel plated brass/stainless st    |
|                       | Enclosure 黄铜镀镍/不锈钢<br>Nickel plated brass/stainless st |
|                       | Base PA66                                              |

Faceplate Thickness : 1 ~ 8 mm