
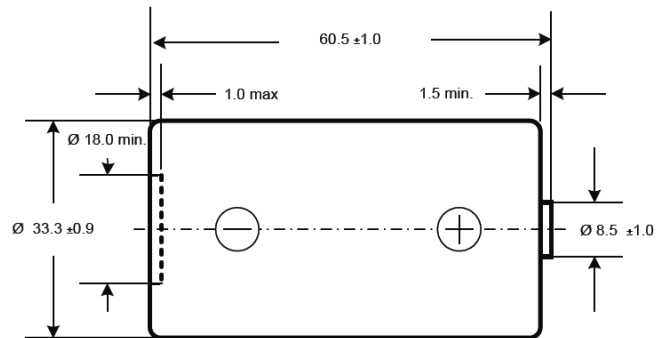




Dimensions are in millimeters and include label.

Chemical system:

Zinc Chloride, ZnCl_2

Designations:

IEC R20, ANSI 13

Nominal Voltage:

1.5V

Nominal Capacity:

6000 mAh at 39 Ohm to 0.8V

Internal Impedance:

1.0 Ohms (max)

Average Weight:

100 g

Average Volume:

53.8 cm^3

Recommended storage temperature:

10 – 25 °C

Operating temperatures:

0 – 45 °C

Reaction:

$2 \text{MnO}_2 + \text{Zn} + \text{H}_2\text{O} \rightarrow 2 \text{MnOOH} + \text{ZnO}$

Terminals:

Flat contacts

Jacket:

Aluminium label

Note:

- 1) No added Mercury / 99.9999% Mercury Free
- 2) No added Lead / 99.999% Lead Free
- 3) No added Cadmium / 99.9999% Cadmium Free
- 4) No added PFOS (Perfluorooctane sulfonates)
- 5) This battery complies with ANSI C18, IEC 60086, and EU Directive 2006/66/EC, 2006/122/EC
- 6) SDS sheets are available on request from Strand Europe Ltd.