


Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

BR1225

■ Dimensions(mm)




Weight: 0.8g


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	48
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

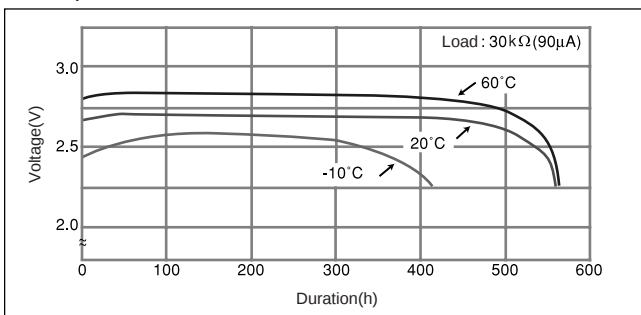

■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

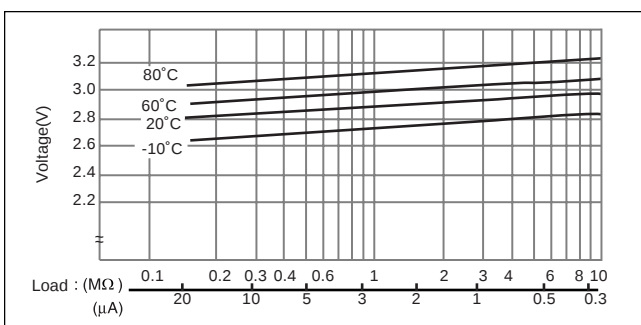


■ Capacity vs. load resistance

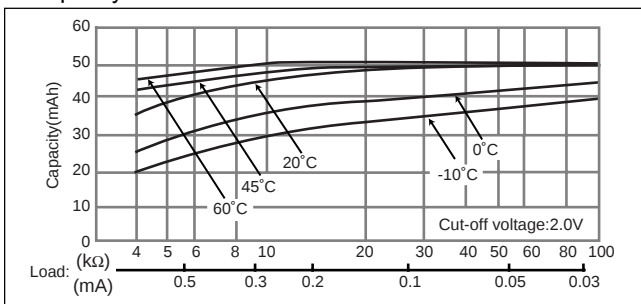

BR1616

■ Dimensions(mm)




Weight: 1.0g


■ Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	48
Continuous standard load (mA)	0.03
Operating temperature (C)	-30 ~ +80


■ Temperature Characteristics

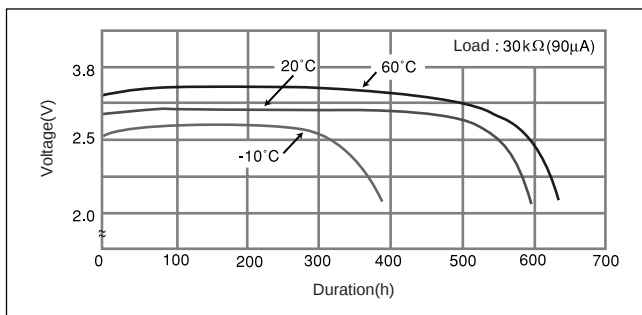



■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

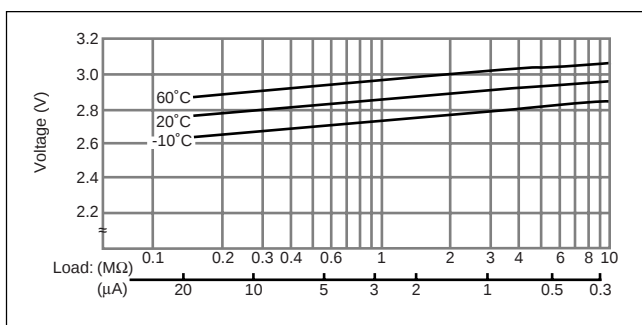



■ Capacity vs. load resistance

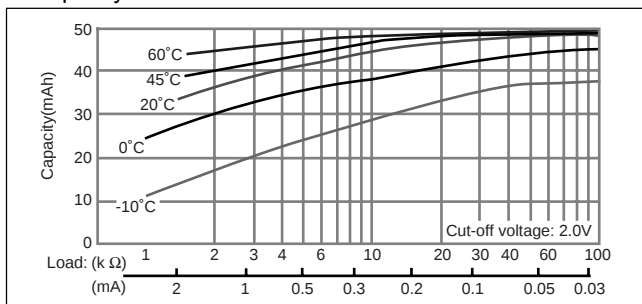



INSULATOR (YELLOW)
[絶縁チューブ* (黄色)]

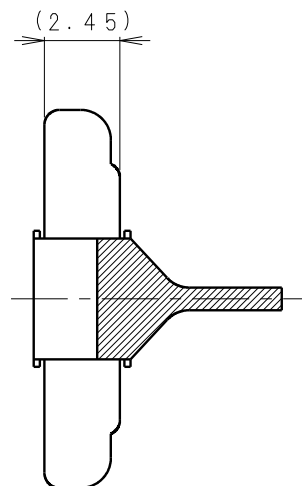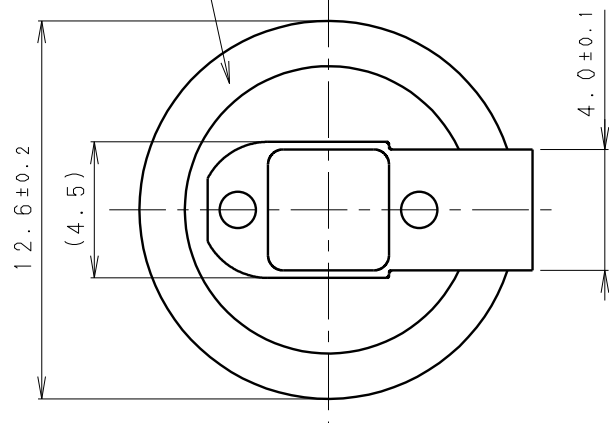

TIN PLATING
[Snメッキ]

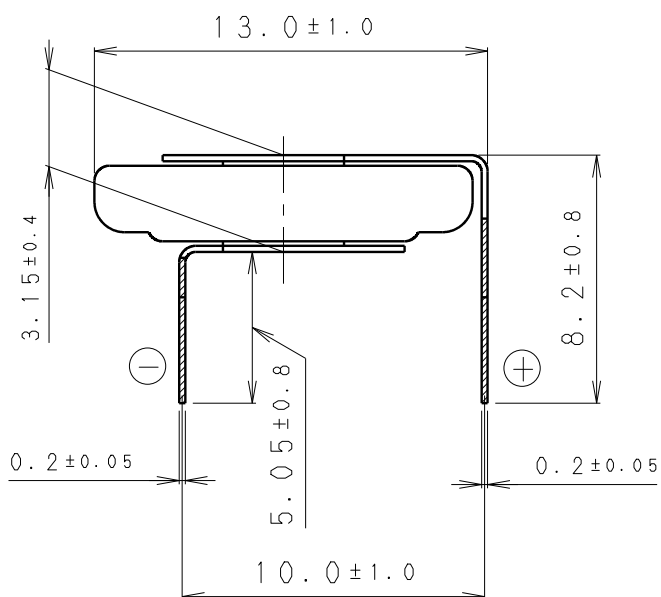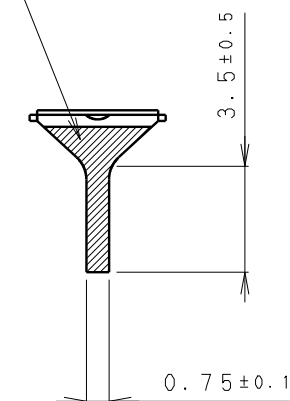


TIN PLATING
[Snメッキ]

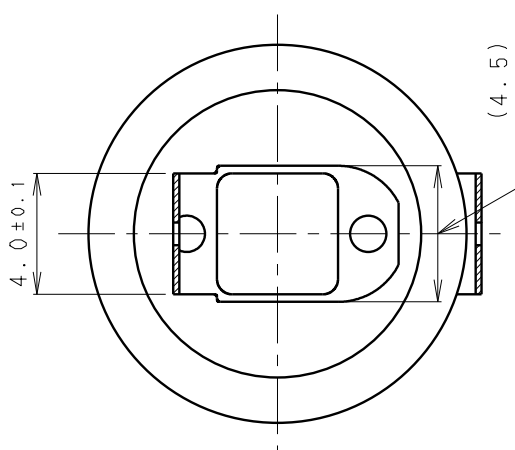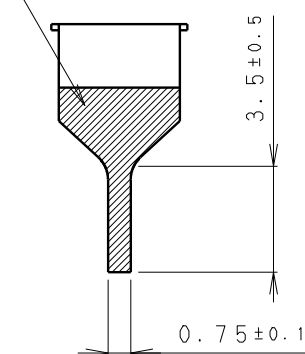

* NOTE [注記]

- TAB PULLING STRENGTH OVER 19.6N
[端子溶接強度：19.6N以上]
- TAB MATERIAL: STAINLESS STEEL WITH TIN PLATING 
[端子材料：基材 ステンレス/表面 部分Snメッキ 
- () : REFERENCE DIMENSION AND ANGLE
[() 寸法、角度は参考値]


PRODUCT NO.	BR-1225/H1AN		SCALE
			4 : 1
DRAWING NO.	JGHA1Z	REV.	
		0	

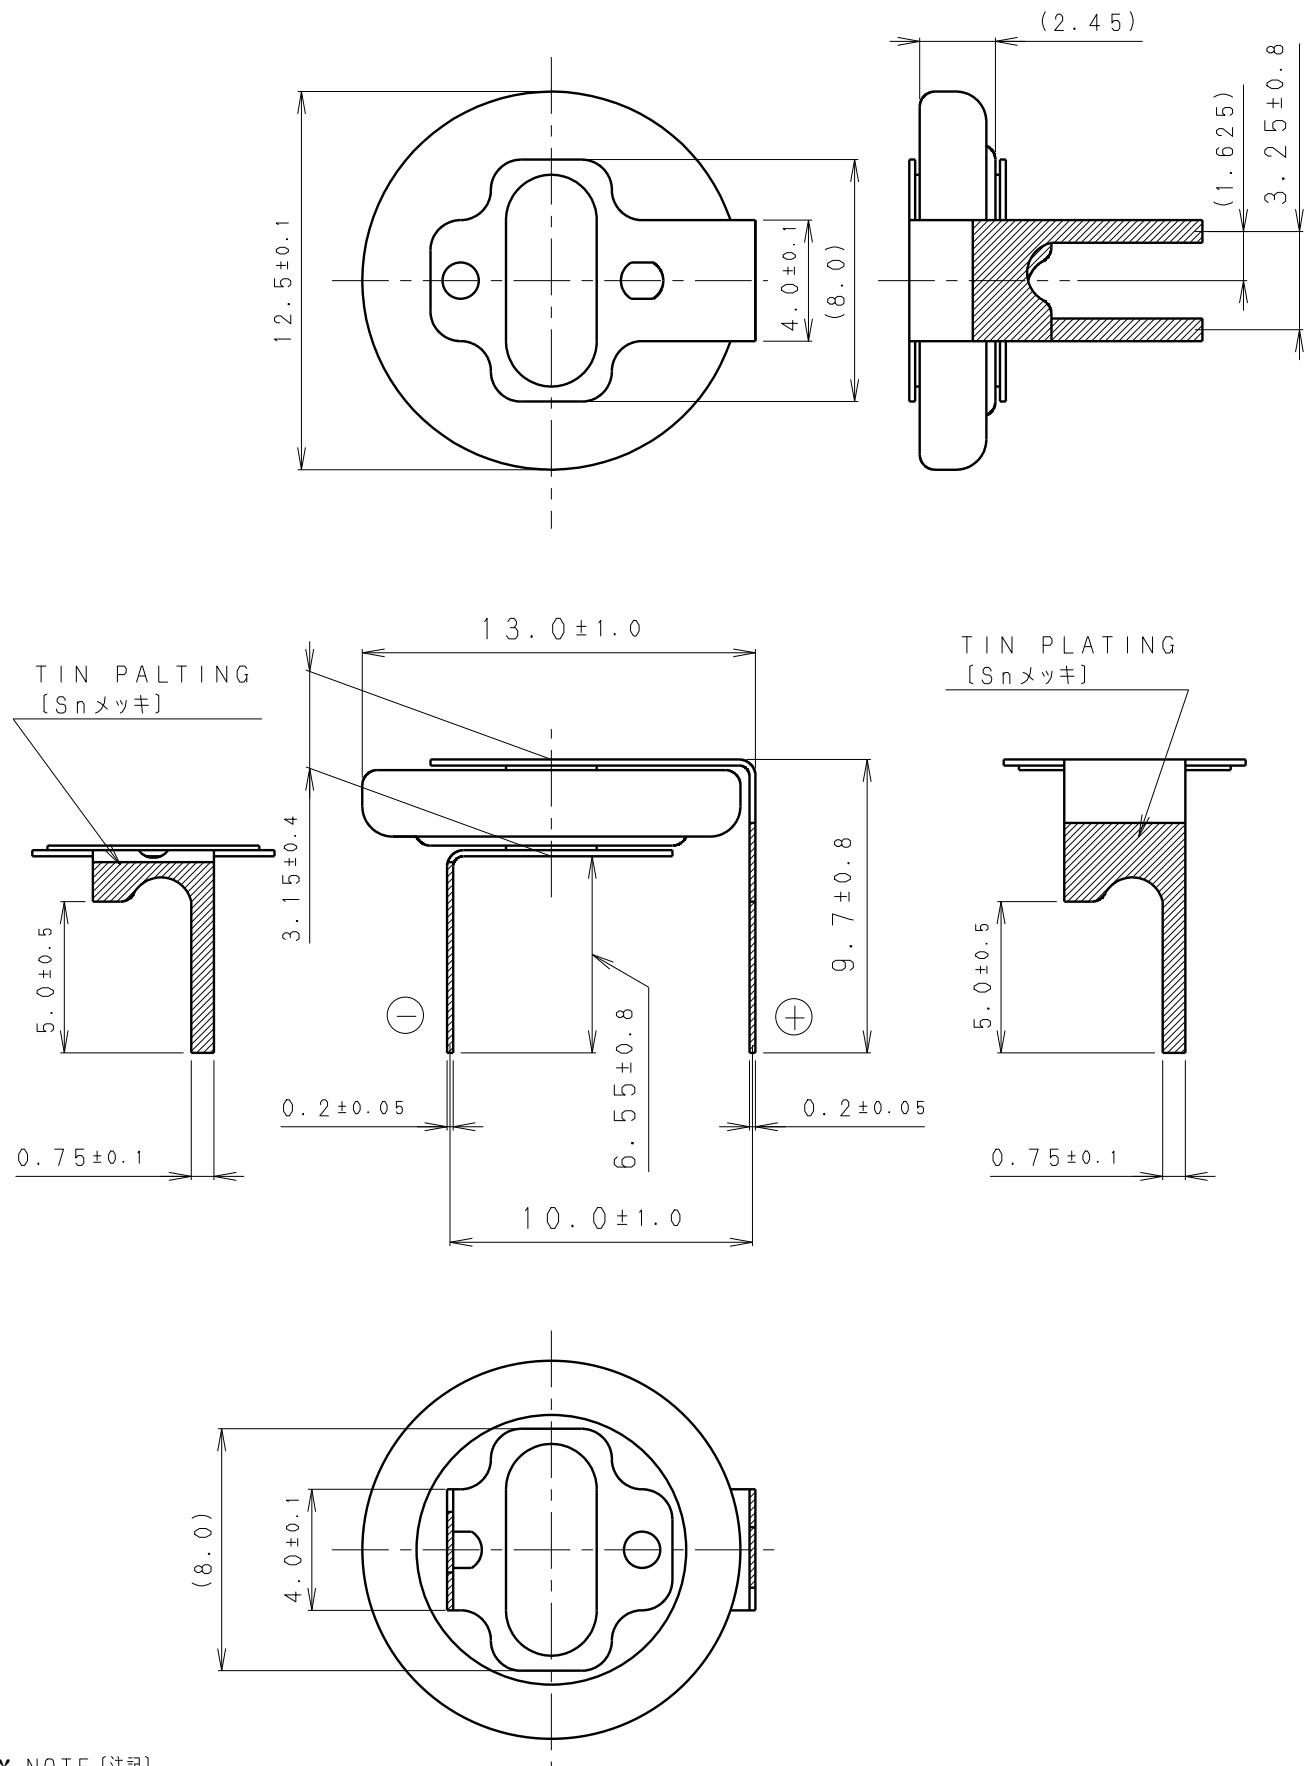

* NOTE [注記]

- TAB PULLING STRENGTH OVER 19.6N
[端子溶接強度：19.6N以上]
- TAB MATERIAL: STAINLESS STEEL WITH TIN PLATING
[端子材料：基材 ステンレス/表面 部分Snメッキ]
- () : REFERENCE DIMENSION AND ANGLE
[() 寸法、角度は参考値]

PRODUCT NO.	BR-1225/HBN	SCALE	
		4 : 1	
DRAWING NO.	JGHB1N	REV.	 UNIT: mm
		0	

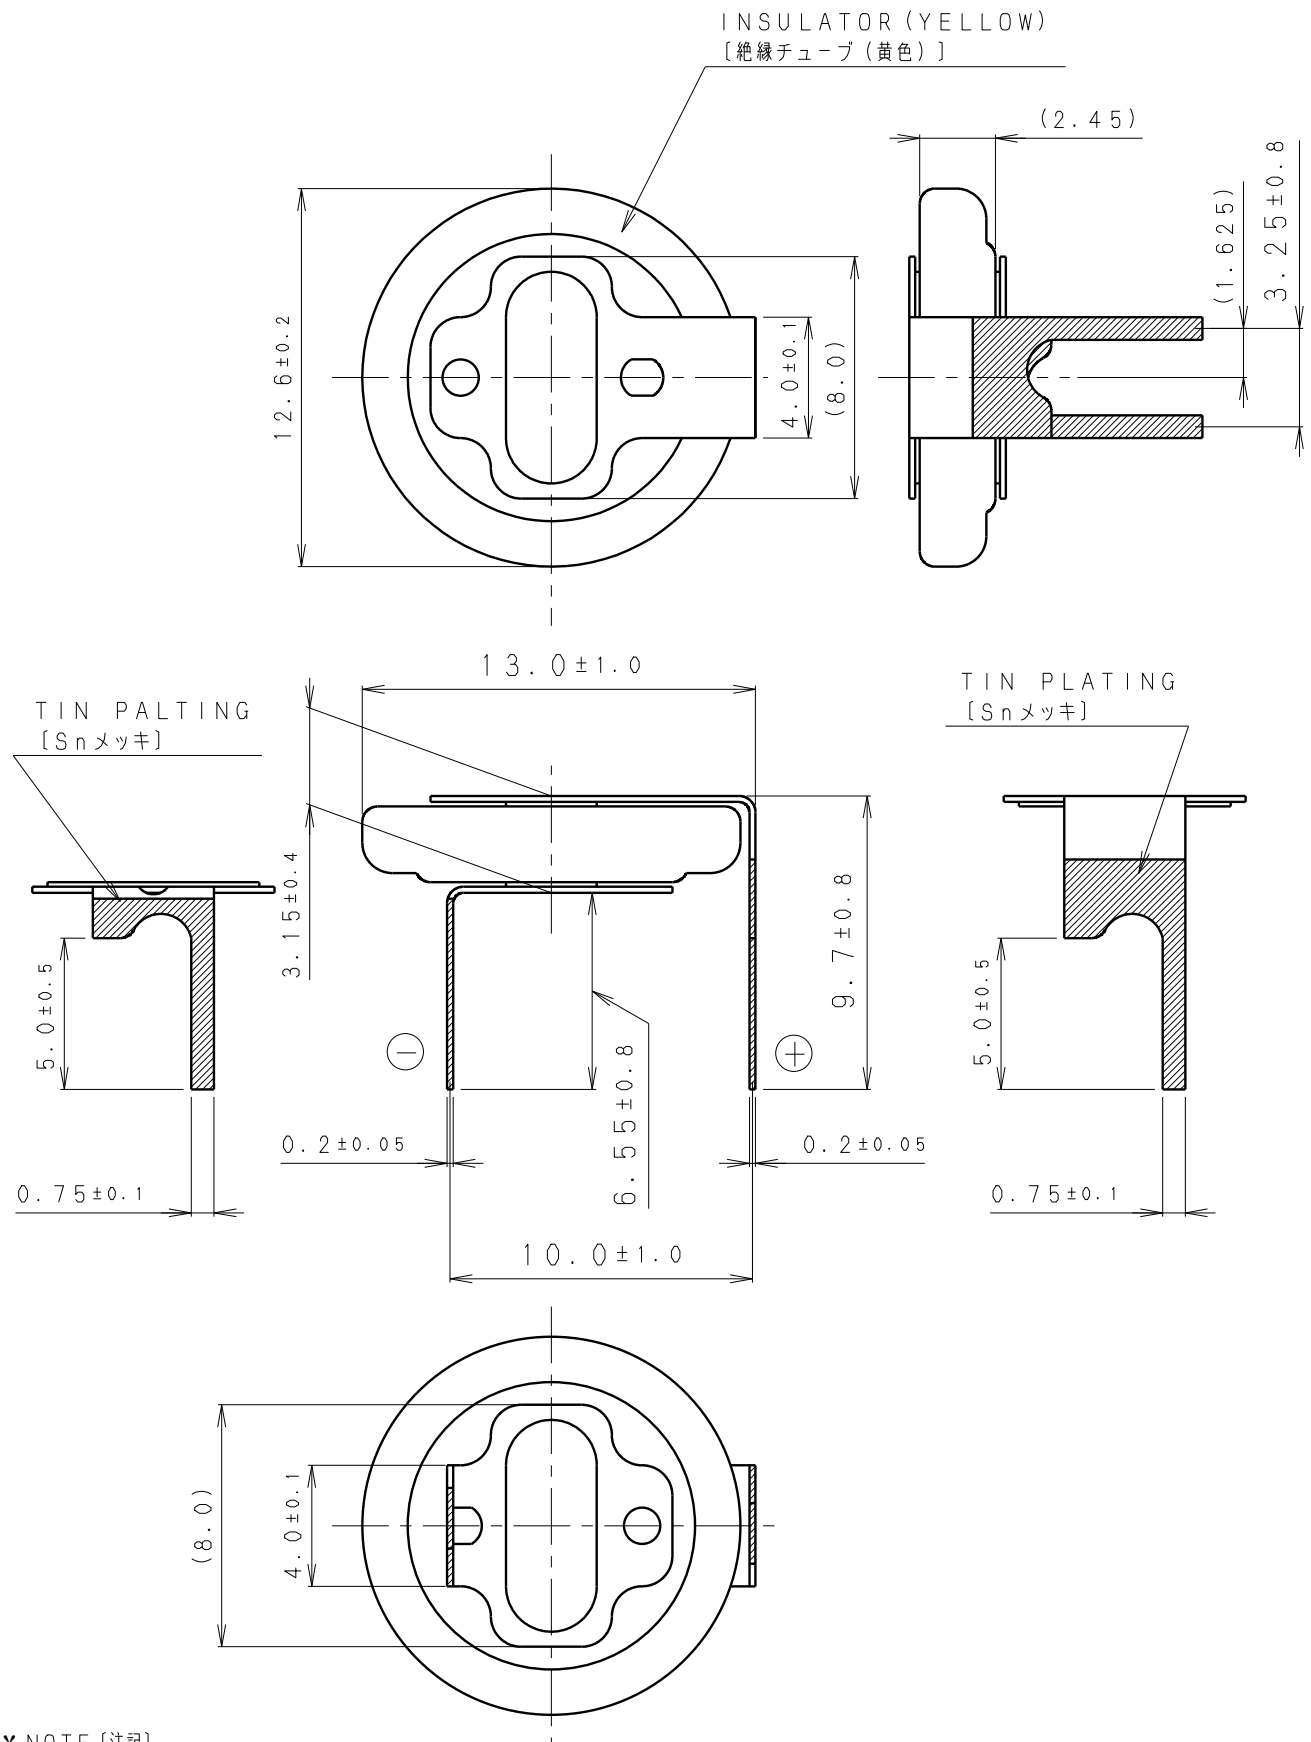

* NOTE [注記]

- TAB PULLING STRENGTH OVER 19.6N
[端子溶接強度：19.6N以上]
- TAB MATERIAL: STAINLESS STEEL WITH TIN PLATING
[端子材料：基材 ステンレス/表面 部分Snメッキ]
- () : REFERENCE DIMENSION AND ANGLE
[() 寸法、角度は参考値]

PRODUCT NO.	BR-1225/HCN	SCALE	
		4 : 1	
DRAWING NO.	JGHB1Z	REV.	 UNIT: mm
		0	