

## DS-2CE56C0T-IRF HD 720p IR Turret Camera



### Key Features

- 1 megapixel high performance CMOS
- Analog HD output, up to 720p resolution
- Day/Night switch
- DNR
- Smart IR
- Up to 20 m IR distance
- Switchable TVI/AHD/CVI/CVBS
- IP66




## Specifications

| <b>Camera</b>        |                                                                              |
|----------------------|------------------------------------------------------------------------------|
| Image Sensor         | 1 MP CMOS image sensor                                                       |
| Signal System        | PAL/NTSC                                                                     |
| Effective Pixels     | 1296 (H) × 732 (V)                                                           |
| Min. illumination    | 0.1 Lux@(F1.2,AGC ON), 0 Lux with IR                                         |
| Shutter Time         | 1/25 (1/30) s to 1/50,000 s                                                  |
| Lens                 | 2.8 mm, 3.6 mm, 6 mm optional                                                |
|                      | Field of view: 70.9° (3.6 mm), 92° (2.8 mm), 56.7° (6 mm)                    |
| Lens Mount           | M12                                                                          |
| Day & Night          | ICR                                                                          |
| Angle Adjustment     | Pan: 0° to 360°, Tilt: 0° to 75°, Rotation: 0° to 360°                       |
| Synchronization      | Internal synchronization                                                     |
| Video Frame Rate     | 720p@25fps/720p@30fps                                                        |
| HD Video Output      | 1 analog HD output                                                           |
| S/N Ratio            | >62 dB                                                                       |
| <b>General</b>       |                                                                              |
| Operating Conditions | -40 °C to 60 °C (-40 °F to 140 °F), Humidity: 90% or less (non-condensation) |
| Power Supply         | 12 V DC ± 15%                                                                |
| Power Consumption    | Max. 4 W                                                                     |
| Protection Level     | IP66                                                                         |
| IR Range             | Up to 20 m                                                                   |
| Dimensions           | Φ 89.9 × 70.1 mm (3.54" × 2.76")                                             |
| Weight               | 280 g (0.62 lb.)                                                             |

## Order Models

DS-2CE56C0T-IRF

## Dimensions

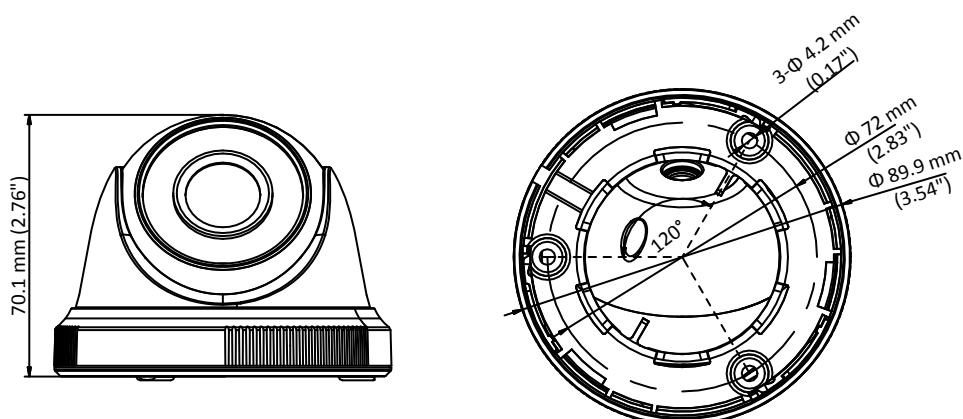

## Accessories



**DS-1272ZJ-110-TRS**  
Wall Mounting Bracket



**DS-1275ZJ**  
Vertical Pole Mounting Bracket



**DS-1276ZJ**  
Corner Mounting Bracket



**DS-1H18**  
Video Balun



**X41T**  
Camera Tester



**DS-1280ZJ-XS**  
Junction Box

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761